



## **AS STANDARD WITH:**

- ✓ **SPLIT**CHILL® cooling, the easy-to-mantain and repair-friendly refrigeration unit, with electronic refrigeration control and electric defrost heating
- rear entry step
- stable stainless steel rear portal with full loading length
- ✓ ESSELMANN **FePur®** isothermal body with robust anodised aluminium profiles and manoeuvring handles
- including registration documents (CoC paper)
- Space for six Euro pallets (1,200x800)


Overall outer dimensions: ca. L/W/H 5,800  $\times$  2,450  $\times$  2,610 mm Interior body dimensions: ca. L/W/H 4,100 x 1,820 x 1,940 mm

Empty weight approx. Perm. gross weight 3,500 kg 2,300 kg Payload in transport approx. Payload in operation approx. 6,000 kg

## **OPTIONALLY AVAILABLE:**

- ESSELMANN **SPLITCHILL®** refrigeration unit in performance-enhanced tropical version for use at up to 43°C outside temperature at 40% higher cooling capacity
- load securing with locking bars
- LED vehicle lighting
- Lettering in digital print full foiling on sides and rear
- 100 km/h preparation
- Height-adjustable draw gear
- synthetic floor coating and lateral ram protection made of anodised aluminium checker plate

from 9,570.-

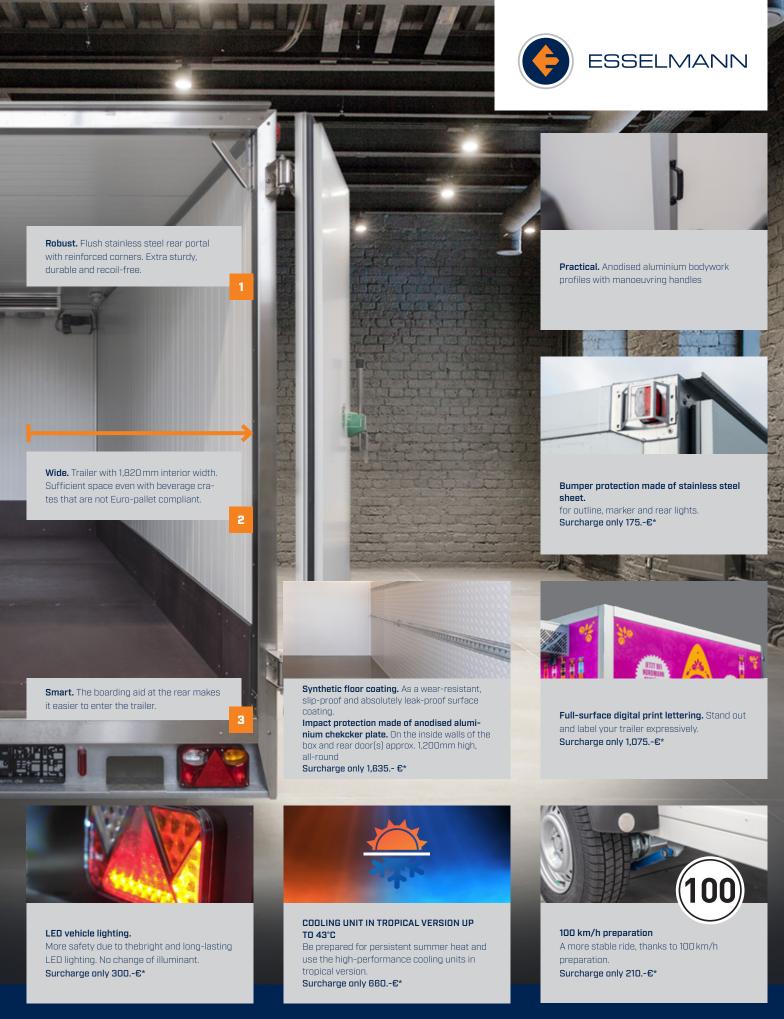

© Esselmann Fahrzeugbau GmbH & Co. KG
Subject to change without prior notice | Illustrations may contain special equipment.
\*The prices shown are net prices and do not include the statutory value-added tax. Delivery ex works. Offer subject to confirmation.